

#### E8762N Modular Recessed Uplight Brass – Round – 240v GU10

Modula is a flexible range of recessed lights featuring an adjustable bracket that provides up to 30° of movement from vertical for directional lighting. Modula lights accept a range of clip on lenses and filters offering a wide choice of lighting effects




#### PHYSICAL DATA

The bezel is constructed from sandblasted brass. The bezel is secured to the anodised aluminium tubular body via four hex bolts (key provided). The body measures 125mm long x 100mm diameter, with the bezel measuring 120mm diameter. The light is mounted in a polycarbonate sleeve measuring 175mm x 105mm diameter. The sleeve has a 2mm taper to one end. Fitted with 2m H07RN-F three core cable

#### ELECTRICAL DATA

240v ac – These lights must be installed by a qualified electrician. Connections should be made via suitable IP68 rated junction boxes and filled with a resin sealant post testing. **Using a single RCD for large numbers of 240v fittings is not recommended due to the risk of nuisance tripping. We advise the use of separate RCD protection for each circuit and a maximum of 12 fittings per RCD**

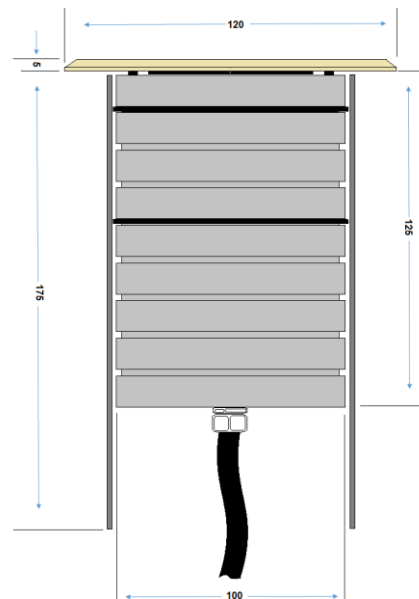

#### COMPATIBLE LAMPS (purchase separately)

GU10COB lamps up to 6w, GU10LED lamps up to 5w and GU10 halogen lamps up to 35w

#### COMPLIANCE & WARRANTY

- 2 Year warranty
- CE / RoHS Compliant

Lighting for Gardens Limited. Registered No.3678804.  
Registered Office: Lower Clough Mill, Pendle Street, Barrowford, Lancashire BB9 8PH  
VAT No 587 6855 66  
Web: [www.lightingforgardens.com](http://www.lightingforgardens.com)  
Email: [technicalsupport@lightingforgardens.com](mailto:technicalsupport@lightingforgardens.com)

Product design & specification subject to change or modification without notice. Image for illustration only. E&OE  
Ver1.0 30-08-2016

**LIGHTING FOR GARDENS**  
[lightingforgardens.com](http://lightingforgardens.com)  
[sales@lightingforgardens.com](mailto:sales@lightingforgardens.com)  
01462 486777

## INSTALLATION

Install the polycarbonate sleeve into the ground during construction or retrofitted into a hole cut with a coring bit: the light pushes into the tube, where it is held firmly in place by two O-rings. Suitable drainage should be provided below each fitting to prevent water logging. Connect input cable to supply via resin filled junction boxes.