



SLV

TRUST 60

outdoor floor stand, LED, 3000K, IP55, stainless steel 316, Ø/H 6/60 cm, 8.6W

Article number 228110

Product family TRUST

Feed-in capability No

Lamp included No

Height 60.5 cm

Diameter 6 cm

Net weight 2.738 kg

Gross weight 2.984 kg

Voltage 220-240V ~50/60Hz

Protection class I

IP-rating IP 55

Average lifespan 35000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 400 lm

Energy efficiency class A++

Way of mounting Surface mounted / Surface ground


Colour Stainless steel



Form cylindric

Light distribution type 1 direct - indirect

Light distribution type 2 rotational symmetric

Material Stainless steel 316

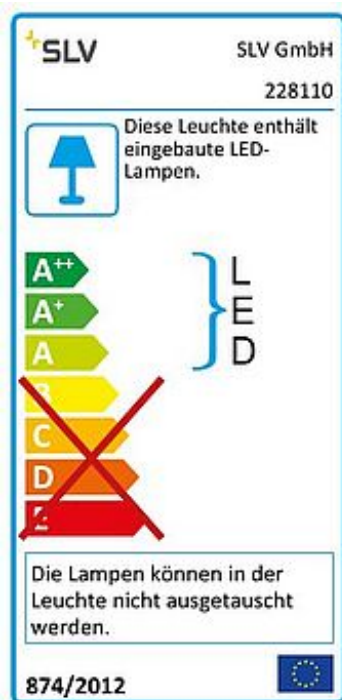

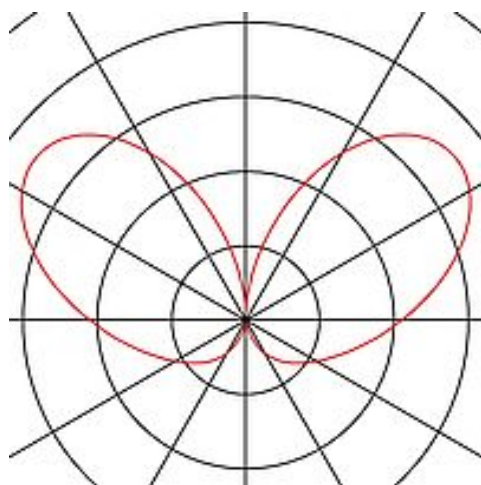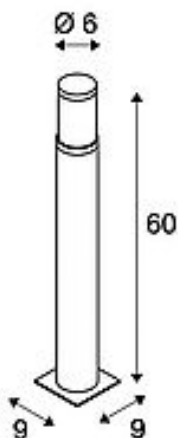

Articles of this series

227932 TRUST, outdoor floor stand, TC-DSE, IP55, stainless steel 304, Ø/H 6/31 cm, max. 11W

227942 TRUST, outdoor wall light, TC-DSE, IP55, stainless steel 304, max. 11W

227962 TRUST, outdoor floor stand, TC-DSE, IP55, stainless steel 304, Ø/H 6/61.5 cm, max. 11W

228120 TRUST, outdoor wall light, LED, 3000K, IP55, stainless steel 316, 8.6W

228100 TRUST 30, outdoor floor stand, LED, 3000K, IP55, stainless steel 316, Ø/H 6/30 cm, 8.6W

With the stainless steel TRUST 60 floor stand, the opalescent PC light surface is enclosed by a stainless steel cap. With protection class IP55, it is suitable for outdoor use. As an option an earth spike as well as a connection box for safe electrical connection to the round luminaire upright, are available. The electrical connection of the luminaire, which comes in two sizes, is directly to the 230V mains supply. A stainless-steel grid is available as a further accessory to change the lighting effect. The TRUST series contains other wall lights and can therefore be used universally. This luminaire is fitted with a powerful 8.6W LED.

Notes
