




The **Cranbrook** is a traditional IP65 rated LED Post Top with a 360° light distribution.

Manufactured with high pressure die-cast aluminium and a prismatic diffuser for a controlled distribution of light.

Options include Mini Photocell, Nema Socket and Dali.

Cranbrook 45W - LED Post Top

Amenity Lighting

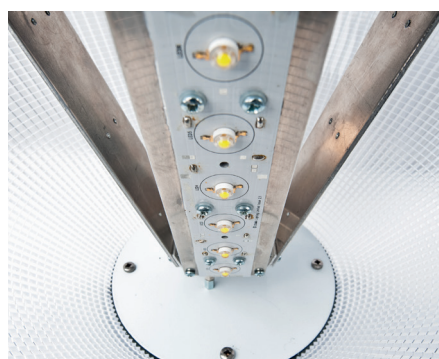


Features

- LED rating 5,880lm (4000K & 6000K).
- LED rating 4,974lm (3000K).
- Luminaire flux 5,104lm (4000K & 6000K).
- Luminaire flux 4,318lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature .
- LED Life span > 100,000hrs.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell, Nema Socket and Dali.
- Manufactured with high pressure die-cast aluminium.
- Diffuser manufactured from UV stabilised polycarbonate.
- Prismatic diffuser for a controlled distribution of light.
- Corrosion resistant polyester powder coating.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

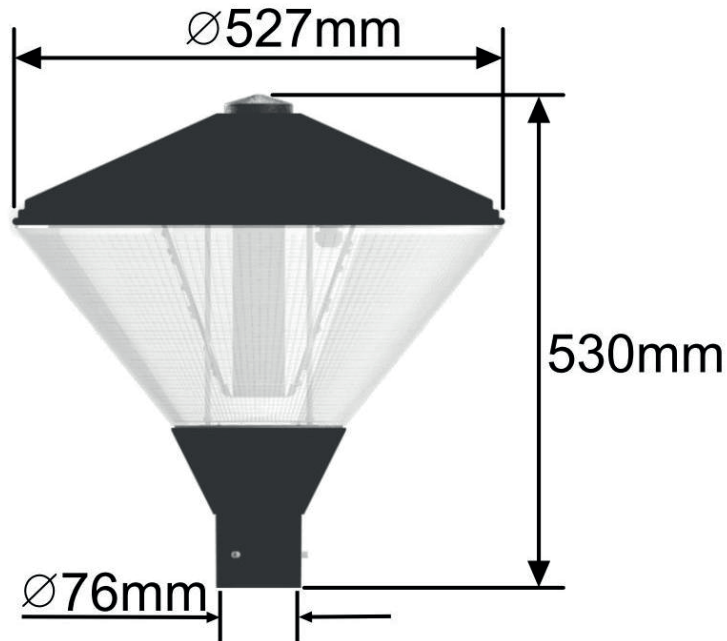

Specifications

Trafalgar 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
Standard															
TP45-A5C-00B-76	Cranbrook-45W-LED-AC-6K-Std-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5N-00B-76	Cranbrook-45W-LED-AC-4K-Std-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5W-00B-76	Cranbrook-45W-LED-AC-3K-Std-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,318	96	5.75	Black	76	
Standard - Mini Photocell															
TP45-A5C-04B-76	Cranbrook-45W-LED-AC-6K-Std-M/Photocell-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5N-04B-76	Cranbrook-45W-LED-AC-4K-Std-M/Photocell-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5W-04B-76	Cranbrook-45W-LED-AC-3K-Std-M/Photocell-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,318	96	5.75	Black	76	
Standard - Nema Socket															
TP45-A5C-05B-76	Cranbrook-45W-LED-AC-6K-Std-NemaSocket-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5N-05B-76	Cranbrook-45W-LED-AC-4K-Std-NemaSocket-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5W-05B-76	Cranbrook-45W-LED-AC-3K-Std-NemaSocket-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,318	96	5.75	Black	76	
Dali															
TP45-A5C-20B-76	Cranbrook-45W-LED-AC-6K-Dali-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5N-20B-76	Cranbrook-45W-LED-AC-4K-Dali-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,104	113	5.75	Black	76	
TP45-A5W-20B-76	Cranbrook-45W-LED-AC-3K-Dali-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,318	96	5.75	Black	76	

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk
01689 606342

