




The Cranbrook is a traditional IP65 rated LED Post Top with a 360° light distribution.

Manufactured with high pressure die-cast aluminium and a prismatic diffuser for a controlled distribution of light.

Options include Mini Photocell, Nema Socket and Dali.

Cranbrook 60W - LED Post Top

Amenity Lighting

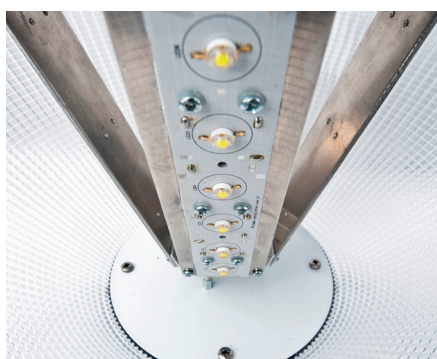


Features

- LED rating 7,752lm (4000K & 6000K).
- LED rating 6,558lm (3000K).
- Luminaire flux 6,729lm (4000K & 6000K).
- Luminaire flux 5,693lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature .
- LED Life span > 100,000hrs.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell, Nema Socket and Dali.
- Manufactured with high pressure die-cast aluminium.
- Diffuser manufactured from UV stabilised polycarbonate.
- Prismatic diffuser for a controlled distribution of light.
- Corrosion resistant polyester powder coating.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

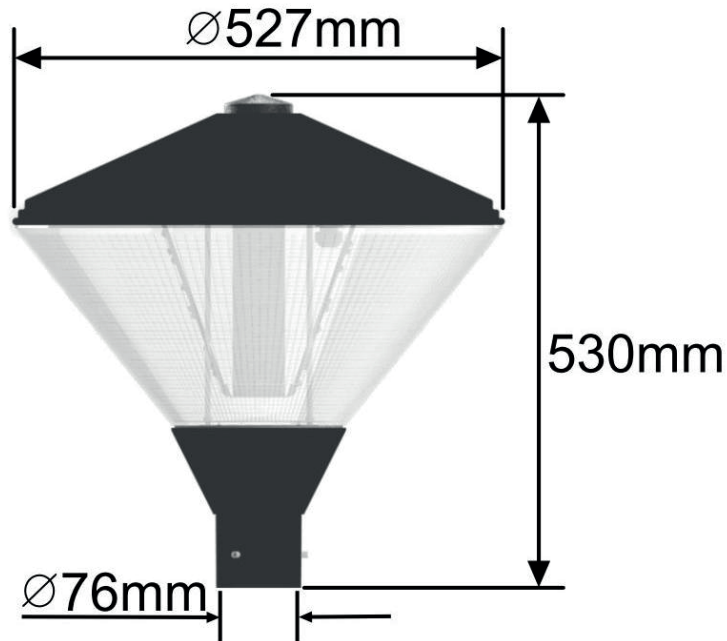

Specifications

Cranbrook 60W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard														
TP60-A7C-00B-76	Cranbrook-60W-LED-AC-6K-Std-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7N-00B-76	Cranbrook-60W-LED-AC-4K-Std-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7W-00B-76	Cranbrook-60W-LED-AC-3K-Std-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,693	95	5.75	Black	76
Standard - Mini Photocell														
TP60-A7C-04B-76	Cranbrook-60W-LED-AC-6K-Std-M/Photocell-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7N-04B-76	Cranbrook-60W-LED-AC-4K-Std-M/Photocell-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7W-04B-76	Cranbrook-60W-LED-AC-3K-Std-M/Photocell-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,693	95	5.75	Black	76
Standard - Nema Socket														
TP60-A7C-05B-76	Cranbrook-60W-LED-AC-6K-Std-NemaSocket-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7N-05B-76	Cranbrook-60W-LED-AC-4K-Std-NemaSocket-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7W-05B-76	Cranbrook-60W-LED-AC-3K-Std-NemaSocket-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,693	95	5.75	Black	76
Dali														
TP60-A7C-20B-76	Cranbrook-60W-LED-AC-6K-Dali-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7N-20B-76	Cranbrook-60W-LED-AC-4K-Dali-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,729	112	5.75	Black	76
TP60-A7W-20B-76	Cranbrook-60W-LED-AC-3K-Dali-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,693	95	5.75	Black	76

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk

01689 606342

