



## Hythe 45W - LED Post Top

The Hythe is a distinctive IP65 post top with a contemporary and elegant feel.

The Hythe's unique shape and appearance will be an impressive addition to any project that requires that something extra special.

Manufactured with a prismatic refactor for high uniformity and a coated black upper canopy to ensure a controlled distribution of light with minimal glare.

Options include Mini Photocell, Dali and spigot size.

### Amenity Lighting



### Features


- LED rating 5,880lm (4000K & 6000K).
- LED rating 4,974lm (3000K).
- Luminaire flux 5,057lm (4000K & 6000K).
- Luminaire flux 4,278lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- Total wattage 45W.
- -20 to +40°C operating temperature.
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Options include Mini Photocell, Dali and spigot size.
- Prismatic refactor & 2 coat reflective surface for high uniformity and minimal upward light.

### Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

01689 606342

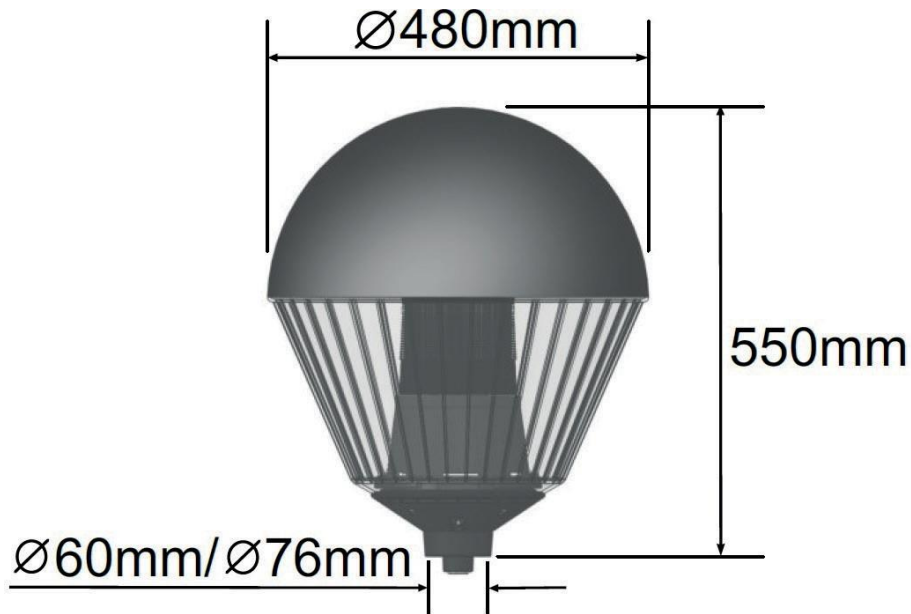

## Specifications

### Hythe 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT(K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
<b>Standard - 76mm Spigot</b>													
CG45-A5C-00B-76	Hythe-45W-LED-AC-6K-Std-Black-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5N-00B-76	Hythe-45W-LED-AC-4K-Std-Black-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5W-00B-76	Hythe-45W-LED-AC-3K-Std-Black-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	76
<b>Standard - 60mm Spigot</b>													
CG45-A5C-00B-60	Hythe-45W-LED-AC-6K-Std-Black-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5N-00B-60	Hythe-45W-LED-AC-4K-Std-Black-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5W-00B-60	Hythe-45W-LED-AC-3K-Std-Black-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	60
<b>Standard - Mini Photocell - 76mm Spigot</b>													
CG45-A5C-04B-76	Hythe-45W-LED-AC-6K-Std-M/Photocell-Black-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5N-04B-76	Hythe-45W-LED-AC-4K-Std-M/Photocell-Black-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5W-04B-76	Hythe-45W-LED-AC-3K-Std-M/Photocell-Black-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	76
<b>Standard - Mini Photocell - 60mm Spigot</b>													
CG45-A5C-04B-60	Hythe-45W-LED-AC-6K-Std-M/Photocell-Black-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5N-04B-60	Hythe-45W-LED-AC-4K-Std-M/Photocell-Black-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5W-04B-60	Hythe-45W-LED-AC-3K-Std-M/Photocell-Black-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	60

# Specifications

## Hythe 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT ( )	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
<b>Dali - 76mm Spigot</b>													
CG45-A5C-20B-76	Hythe-45W-LED-AC-6K-Dali-Black-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5N-20B-76	Hythe-45W-LED-AC-4K-Dali-Black-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	76
CG45-A5W-20B-76	Hythe-45W-LED-AC-3K-Dali-Black-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	76
<b>Dali - 60mm Spigot</b>													
CG45-A5C-20B-60	Hythe-45W-LED-AC-6K-Dali-Black-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5N-20B-60	Hythe-45W-LED-AC-4K-Dali-Black-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,057	112	5	Black	60
CG45-A5W-20B-60	Hythe-45W-LED-AC-3K-Dali-Black-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,278	95	5	Black	60

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

0689 606342

