


## Wiring

Having correctly identified the wiring from your existing light fitting, connect to the approved IP67 (or higher rated) terminal block in the following way. (recommended terminal block ref. 61515)

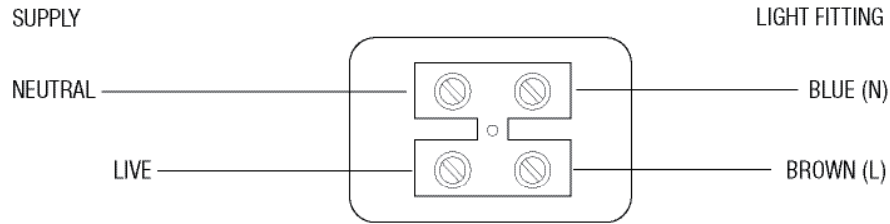


## Check that...


- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the terminals.

## Care and Safety

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- For your safety, always switch off the supply before cleaning.



The LED module is protected by a shade. This part must be replaced immediately should the shade become cracked or damaged. This fitting must not be used without the shade in place.

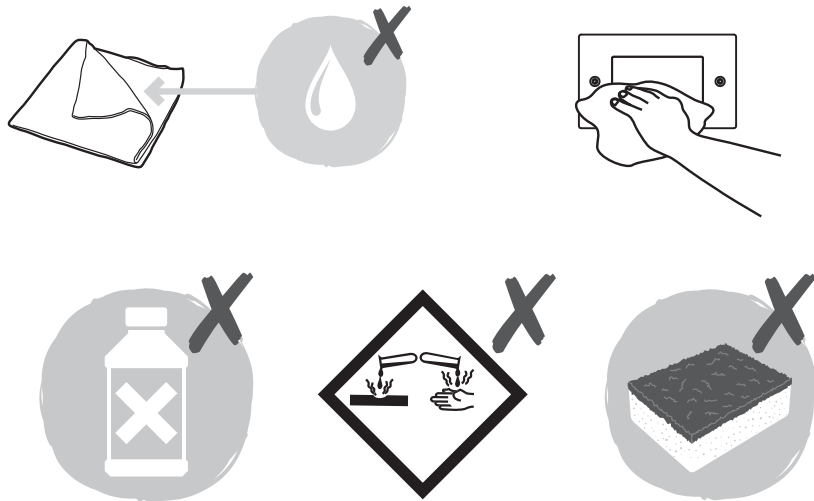

## Instruction leaflet

# Seina Half Bricklight

78645, 75528



CE

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.





This product is manufactured from marine grade stainless steel, making it suitable for application in coastal environments.

This bricklight product is specifically designed and tested for installation into vertical walls only. Under no circumstances should it be fitted into the ground or into horizontal surfaces.

This product is not suitable for dimming.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Technical data

Supply Voltage:	240V~, 50 Hz
Bulb Type:	LED (2W) 2835 SMD module 4000K - 100lm
	The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
	Conformity with all relevant EC Directive requirements.
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.
	The power supply is Double Insulated and does not require connection to an Earth circuit.
	This product is not suitable for dimming.
<b>IP44</b>	Splash-proof

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

- Select a mounting location for the product and prepare a cut out size of H65mm x W103mm x D103mm. If removing an existing brick, the mortar should not be removed.
- Pass the incoming supply cable through the cut out and through the outer frame.
- Fit the 4 spring clips into the outer frame by pushing them into the slots. Ensure they are securely fitted and then securely fit the outer frame into the wall. See Fig 2.
- Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>
- Cables must be protected using suitable conduit or plastic trunking.
- Product must only be be installed into vertical walls.
- Tighten the cable gland to ensure waterproof seal.
- Re-assemble the bricklight, ensuring the front bezel is securely fitted to ensure waterproof seal.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fig 1.

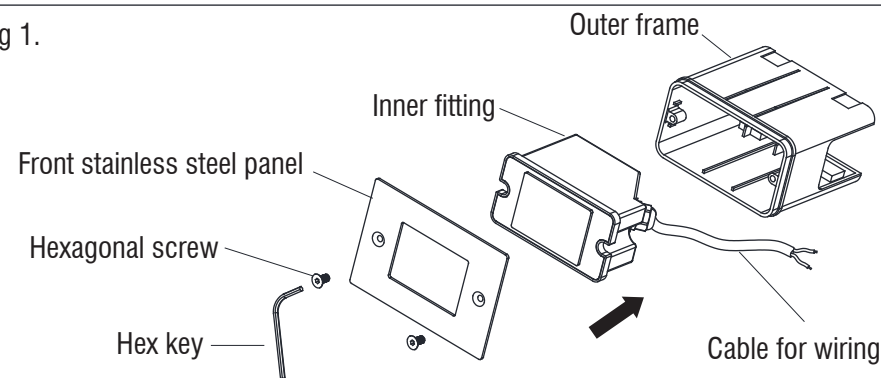


Fig 2.

