



## Exterior Lights UK Ltd

The Kemsing is a high performance IP65 rated LED post top / globe.


Manufactured with high pressure die-cast aluminium and an elegant prismatic diffuser for an ornate feel and a controlled distribution of light.

Options include Mini Photocell and Dali.



# Kemsing 60W - LED Globe

## Amenity Lighting

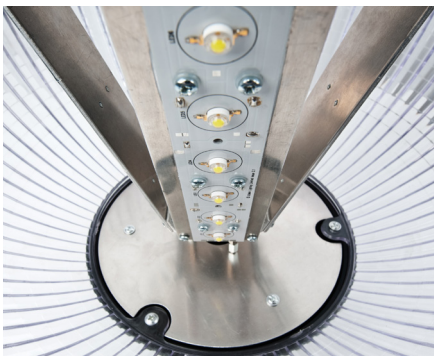

## Features


- LED rating 7,752lm (4000K & 6000K).
- LED rating 6,558lm (3000K).
- Luminaire flux 6,705lm (4000K & 6000K).
- Luminaire flux 5,673lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell and Dali.
- Manufactured with high pressure die-cast aluminium.
- Diffuser manufactured from UV stabilised polycarbonate.
- Prismatic diffuser for an ornate feel and a controlled distribution of light.

## Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

**01689 606 342**

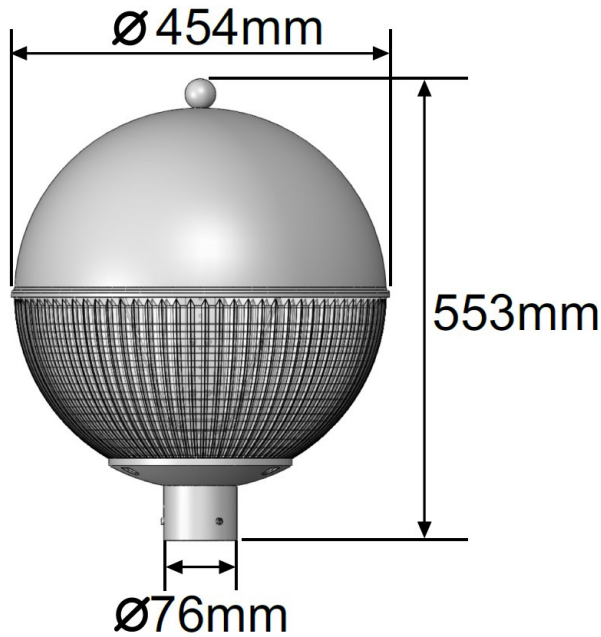

## Specifications

### Kemsing 60W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
<b>Standard - Black Top</b>															
WG60-A7C-00B-76	Kemsing-60W-LED-AC-6K-Standard-BlackTop-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7N-00B-76	Kemsing-60W-LED-AC-4K-Standard-BlackTop-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7W-00B-76	Kemsing-60W-LED-AC-3K-Standard-BlackTop-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,673	95	5.25	Black	76	
<b>Standard - Mini Photocell</b>															
WG60-A7C-04B-76	Kemsing-60W-LED-AC-6K-Standard-M/Photocell-BlackTop-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7N-04B-76	Kemsing-60W-LED-AC-4K-Standard-M/Photocell-BlackTop-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7W-04B-76	Kemsing-60W-LED-AC-3K-Standard-M/Photocell-BlackTop-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,673	95	5.25	Black	76	
<b>Dali</b>															
WG60-A7C-20B-76	Kemsing-60W-LED-AC-6K-Dali-BlackTop-76mm	LED	7,752	60	CW	6K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7N-20B-76	Kemsing-60W-LED-AC-4K-Dali-BlackTop-76mm	LED	7,752	60	NW	4K	Ra>70	220-240	700	6,705	112	5.25	Black	76	
WG60-A7W-20B-76	Kemsing-60W-LED-AC-3K-Dali-BlackTop-76mm	LED	6,558	60	WW	3K	Ra>80	220-240	700	5,673	95	5.25	Black	76	

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk  
01689 606 342



V220615