



The Sandgate is a popular IP65 White/Opal post top with a traditional feel.

Manufactured with the latest High Power LEDs from Osram and featuring a premium Osram Driver.

Options include Mini Photocell, Dali and spigot size.

Sandgate 45W - LED Post Top

Amenity Lighting




Features

- LED rating 5,880lm (4000K & 6000K).
- LED rating 4,974lm (3000K)
- Luminaire flux 4,381lm (4000K & 6000K).
- Luminaire flux 3,706lm (3000K)
- Total wattage 45W.
- -20 to +40°C operating temperature.
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Options include Mini Photocell, Dali and spigot size.
- Manufactured from UV stabilised polycarbonate.
- Prismatic refractor inside for high uniformity.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

www.exteriorlights.co.uk
01689 606342

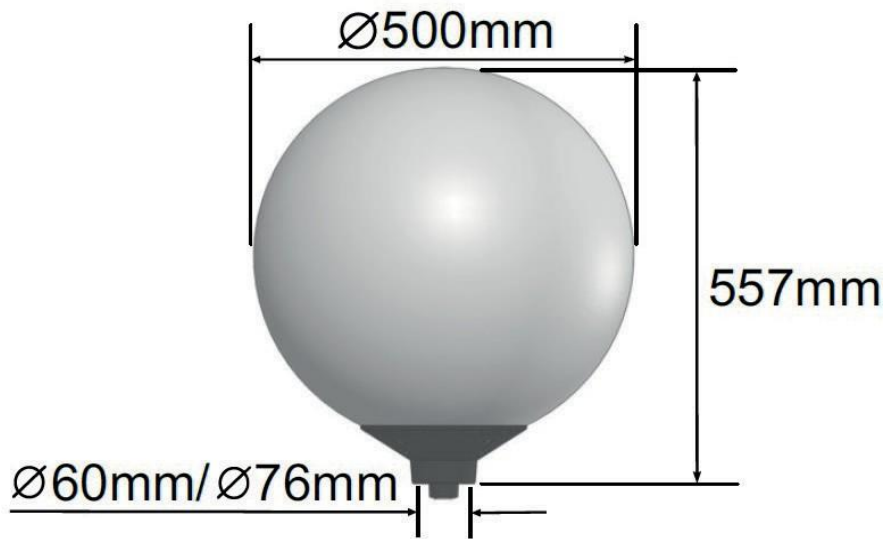

Specifications

Sandgate 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT(K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard - 76mm Spigot													
AL45-A5C-00W-76	Sandgate-45W-LED-AC-6K-Std-White-76mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5N-00W-76	Sandgate-45W-LED-AC-4K-Std-White-76mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5W-00W-76	Sandgate-45W-LED-AC-3K-Std-White-76mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	76
Standard - 60mm Spigot													
AL45-A5C-00W-60	Sandgate-45W-LED-AC-6K-Std-White-60mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5N-00W-60	Sandgate-45W-LED-AC-4K-Std-White-60mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5W-00W-60	Sandgate-45W-LED-AC-3K-Std-White-60mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	60
Standard - Mini Photocell - 76mm Spigot													
AL45-A5C-04W-76	Sandgate-45W-LED-AC-6K-Std-M/Photocell-White-76mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5N-04W-76	Sandgate-45W-LED-AC-4K-Std-M/Photocell-White-76mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5W-04W-76	Sandgate-45W-LED-AC-3K-Std-M/Photocell-White-76mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	76
Standard - Mini Photocell - 60mm Spigot													
AL45-A5C-04W-60	Sandgate-45W-LED-AC-6K-Std-M/Photocell-White-60mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5N-04W-60	Sandgate-45W-LED-AC-4K-Std-M/Photocell-White-60mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5W-04W-60	Sandgate-45W-LED-AC-3K-Std-M/Photocell-White-60mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	60

Specifications

Sandgate 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT ()	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Dali - 76mm Spigot													
AL45-A5C-20W-76	Sandgate-45W-LED-AC-6K-Dali-White-76mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5N-20W-76	Sandgate-45W-LED-AC-4K-Dali-White-76mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	76
AL45-A5W-20W-76	Sandgate-45W-LED-AC-3K-Dali-White-76mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	76
Dali - 60mm Spigot													
AL45-A5C-20W-60	Sandgate-45W-LED-AC-6K-Dali-White-60mm	LED	5,880	45	6K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5N-20W-60	Sandgate-45W-LED-AC-4K-Dali-White-60mm	LED	5,880	45	4K	Ra>70	220-240	525	4,381	97	5	White	60
AL45-A5W-20W-60	Sandgate-45W-LED-AC-3K-Dali-White-60mm	LED	4,974	45	3K	Ra>80	220-240	525	3,706	82	5	White	60

Legend: **M/Photocell** = Mini Photocell. **3K**= Warm White(3000K) **4K** = Neutral White (4000K). **6K** = Cool White (6000K).