



## Exterior Lights UK Ltd



The **Wadhurst 120W** is a high performance IP65/IP66 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured with anti-corrosion die cast aluminium, stainless steel fixings and featuring high impact glass for additional protection.

Complete with adjustable spigot for side or column top entry, and 15M of cable for a quick installation.

Options include Nema socket, Dali Driver, LED colour temperature, and spigot size.

# Wadhurst 120W - LED Street Light

## Street Lighting



## Features


- LED rating 17,664lm (4000K & 6000K).
- LED rating 14,944lm (3000K).
- Luminaire flux 15,544lm (4000K & 6000K).
- Luminaire flux 13,150lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 60/76mm spigot options.
- Anti-corrosion die cast aluminium.
- Corrosion resistant polyester powder coating.
- Optimised optics for high uniformity and maximum spacing's between columns.
- Future proof design.

## Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

**01689 606 342**

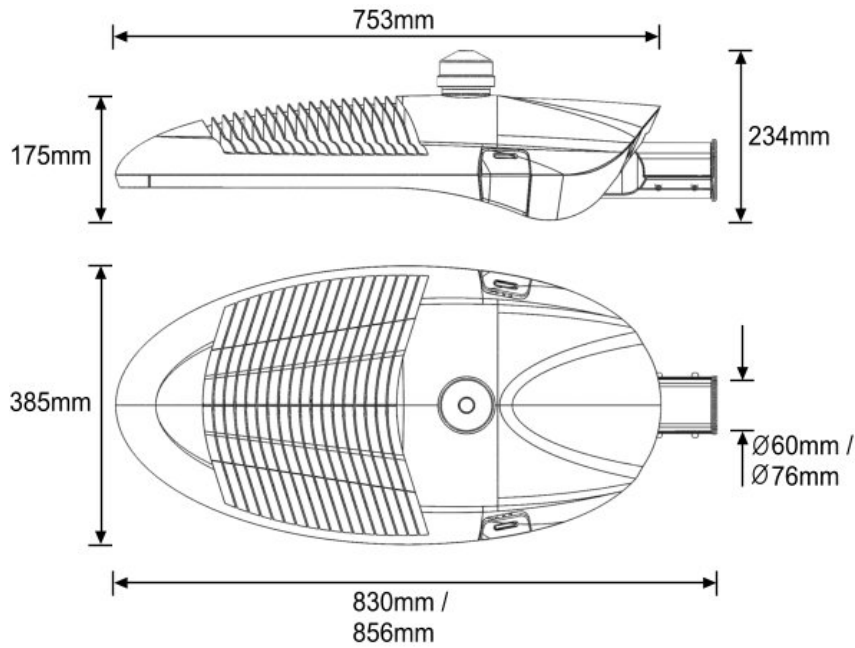

## Specifications

### Wadhurst 120W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
<b>Standard-Grey-6K</b>															
CQ120-A6C-00G-60	Wadhurst-120W-LED-AC-6K-Std-Grey-60mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14	Grey	60	
CQ120-A6C-00G-76	Wadhurst-120W-LED-AC-6K-Std-Grey-76mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14	Grey	76	
<b>Standard-Grey-4K</b>															
CQ120-A6N-00G-60	Wadhurst-120W-LED-AC-4K-Std-Grey-60mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14	Grey	60	
CQ120-A6N-00G-76	Wadhurst-120W-LED-AC-4K-Std-Grey-76mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14	Grey	76	
<b>Standard-Grey-3K</b>															
CQ120-A6W-00G-60	Wadhurst-120W-LED-AC-3K-Std-Grey-60mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14	Grey	60	
CQ120-A6W-00G-76	Wadhurst-120W-LED-AC-3K-Std-Grey-76mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14	Grey	76	
<b>Standard-Grey-NemaSocket-6K</b>															
CQ120-A6C-06G-60	Wadhurst-120W-LED-AC-6K-Std-NemaSocket-Grey-60mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14.25	Grey	60	
CQ120-A6C-06G-76	Wadhurst-120W-LED-AC-6K-Std-NemaSocket-Grey-76mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14.25	Grey	76	
<b>Standard-Grey-NemaSocket-4K</b>															
CQ120-A6N-06G-60	Wadhurst-120W-LED-AC-4K-Std-NemaSocket-Grey-60mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14.25	Grey	60	
CQ120-A6N-06G-76	Wadhurst-120W-LED-AC-4K-Std-NemaSocket-Grey-76mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14.25	Grey	76	
<b>Standard-Grey-NemaSocket-3K</b>															
CQ120-A6W-06G-60	Wadhurst-120W-LED-AC-3K-Std-NemaSocket-Grey-60mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14.25	Grey	60	
CQ120-A6W-06G-76	Wadhurst-120W-LED-AC-3K-Std-NemaSocket-Grey-76mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14.25	Grey	76	
<b>Dali-Grey-6K</b>															
CQ120-A6C-20G-60	Wadhurst-120W-LED-AC-6K-Dali-Grey-60mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14	Grey	60	
CQ120-A6C-20G-76	Wadhurst-120W-LED-AC-6K-Dali-Grey-76mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14	Grey	76	

# Specifications

## Wadhurst 120W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
<b>Dali-Grey-4K</b>															
CQ120-A6N-20G-60	Wadhurst-120W-LED-AC-4K-Dali-Grey-60mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14	Grey	60	
CQ120-A6N-20G-76	Wadhurst-120W-LED-AC-4K-Dali-Grey-76mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14	Grey	76	
<b>Dali-Grey-3K</b>															
CQ120-A6W-20G-60	Wadhurst-120W-LED-AC-3K-Dali-Grey-60mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14	Grey	60	
CQ120-A6W-20G-76	Wadhurst-120W-LED-AC-3K-Dali-Grey-76mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14	Grey	76	
<b>Dali-Grey-NemaSocket-6K</b>															
CQ120-A6C-26G-60	Wadhurst-120W-LED-AC-6K-Dali-NemaSocket-Grey-60mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14.25	Grey	60	
CQ120-A6C-26G-76	Wadhurst-120W-LED-AC-6K-Dali-NemaSocket-Grey-76mm	LED	17,664	120	CW	6K	Ra>70	220-240	625	15,544	130	14.25	Grey	76	
<b>Dali-Grey-NemaSocket-4K</b>															
CQ120-A6N-26G-60	Wadhurst-120W-LED-AC-4K-Dali-NemaSocket-Grey-60mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14.25	Grey	60	
CQ120-A6N-26G-76	Wadhurst-120W-LED-AC-4K-Dali-NemaSocket-Grey-76mm	LED	17,664	120	NW	4K	Ra>70	220-240	625	15,544	130	14.25	Grey	76	
<b>Dali-Grey-NemaSocket-3K</b>															
CQ120-A6W-26G-60	Wadhurst-120W-LED-AC-3K-Dali-NemaSocket-Grey-60mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14.25	Grey	60	
CQ120-A6W-26G-76	Wadhurst-120W-LED-AC-3K-Dali-NemaSocket-Grey-76mm	LED	14,944	120	WW	3K	Ra>80	220-240	625	13,150	110	14.25	Grey	76	

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.