



Constant Voltage IP67 24VDC

LD-IP10/24



Technical Specification

Order Code		LD-IP10/24
Output	Rated Power	IOW
	Rated Current	0.417A
	Output Voltage	24V DC
	Voltage Tolerance	±0.5V
Input	Voltage Range	170~265VAC
	Frequency Range	47~63Hz
	Efficiency (Typ)	81%
	Power Factor (Typ)	0.8
	AC Current (Typ)	0.090A
	Inrush Current (Max)	70A Max(50% Ipeak Twidth=485µs) 230V AC
Protection	Overload	≤ 120%
	Short circuit	Recovers automatically after condition is removed
Environment	Working Temp	-30~+50°C
	Working Humidity	20~90%RH, non-condensing
	Ingress Protection	IP67 waterproof
	Storage Temp / Humidity	-40~+80°C, 10~95%RH
Safety & EMC	Safety Standards	EN61347-1; EN61347-2-13,SELV, IP67 approved
	Withstand Voltage	I/P-O/P:3KVAC; I/P-FG:3KVAC; O/P-FG:0.5KVAC
	Isolation Resistance	I/P-O/ P:150MΩ / 500VDC / 25°C / 70%RH
	EMC Emission	EN 55015:2013
	EMC Immunity	EN 61547:2009

To calculate the maximum number of drivers per mcb the following calculation can be applied: Number for drivers= Ipeak (breaker)/ Isurge (driver).


Consult breaker manufacturer for guidance on circuit breakers for direct current applications.









Dimensions

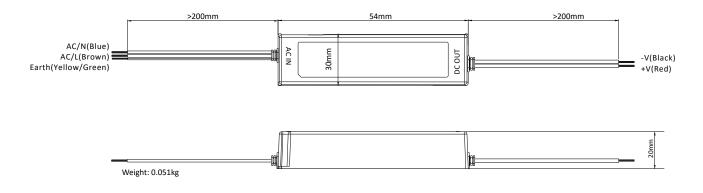

Recommended Mounting Position




Mains Wiring Diagram

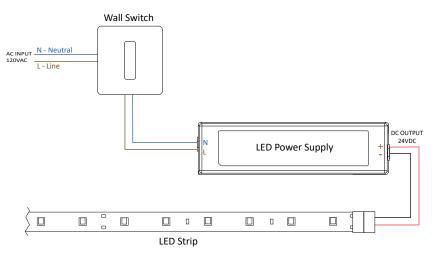


 $\ensuremath{^*}$ Consult switch manufacturer wiring diagram for connections on the switch








Intalite Controllers Wiring Diagram

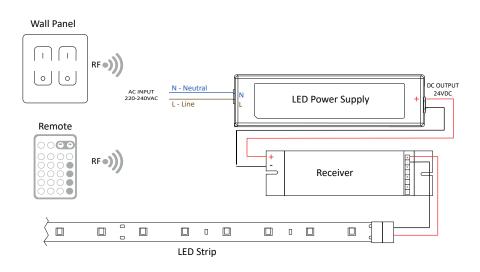

Derating Curve

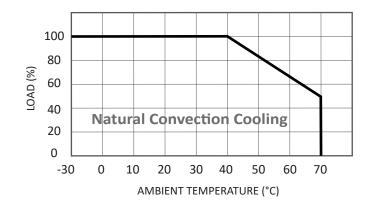

Guarantee:

All LED and electrical components carry a 5 year electrical guarantee, All lamps have their own average life span. We recommend all products are installed by NICEIC / registered electrical contractors, failure to do so will result in any guarantee becoming void.

Full Terms & Conditions:

For our full terms and conditions please visit our website - www.intalite.co.uk/terms-conditions

INTALITE UK 148 - 154 Merton High Street; London, SW19 1AZ, UK Tel: +44 (0)20 8542 1471 Fax: 0870 4211 763 www.intalite.co.uk sales@intalite.co.uk

