

E6621 – Midas Tapered Spreadlight – Natural Copper -12v

Description

Elipta Midas spreadlights provide a wide soft pool of light for the illumination of paths or steps and around the terrace, drive and lawn. These 12v IP66 spreadlights hide the light source under the shade for low glare lighting, providing a pool of light about 4m in diameter. All our natural copper fittings come with a polished finish that weathers to a Verdigris Patina blending naturally with brick, stone and many natural materials.

If a polished look is desired we recommend regular polishing; be sure to remove all traces of polish to prevent dark stains appearing




Installation guidelines


Connect fitted 1.5m cable to low voltage supply cable by crimped heat shrink joint - order cable joint kit T9962 separately. Connect into a cable run supplying several fittings with a T9963 cable splice kit, which is also used for all connections where 4mm low voltage cable is used for longer cable runs.

12 volts - requires power from a remote transformer.



Colour/ Finish	High-grade spun copper shade and Solid natural copper body with a polished finish, this will weather to a mottled brown finish in 2-3 years approx.
Exterior Dimensions	540mm high and shade 245mm wide.
Cable	Prewired with 1.5m 1.0mm ² HO7RN-F

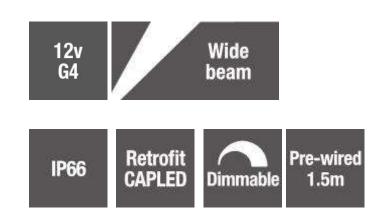

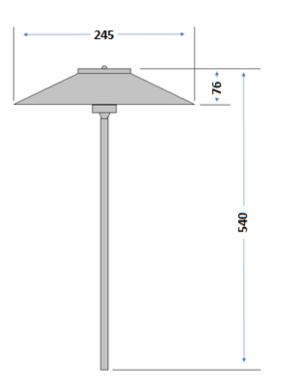

Notur	al connor ho	du
Natur	al copper bo	uy

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Natural copper will discolour (verdigris) over time. Damage due to incorrect installation practices. Responsibility for 3rd party cost; indirect or consequential loss.