
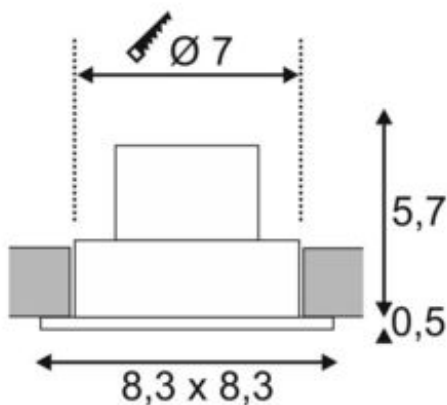


## PATTA-F recessed ceiling light

square, matt black, 9W, 38°, 3000K, incl. driver

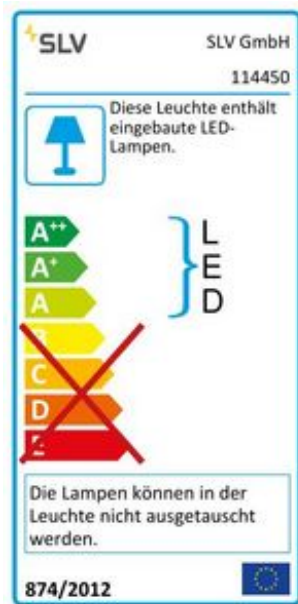

|                           |                           |
|---------------------------|---------------------------|
| Article number            | 114450                    |
| Feed-in capability        | No                        |
| Number of light sources   | 1                         |
| Lamp included             | Yes                       |
| Installation diameter     | 7 cm                      |
| Installation depth        | 7 cm                      |
| Length                    | 8.3 cm                    |
| Width                     | 8.3 cm                    |
| Height                    | 6.2 cm                    |
| Net weight                | 0.335 kg                  |
| Gross weight              | 0.401 kg                  |
| Voltage                   | 230 Volts                 |
| Max. wattage              | 12 Watt                   |
| Protection class          | II                        |
| Beam angle                | 38 Degree                 |
| Average lifespan          | 40000 Hours               |
| Colour temperature        | 3000 Kelvin               |
| Colour rendering index    | 80                        |
| Luminous flux             | 630 lm                    |
| Energy efficiency class   | A+                        |
| Lamp                      | COB LED module            |
| Material                  | Aluminium / Glass         |
| Colour                    | matt black                |
| Way of mounting           | Recessed ceiling mounting |
| Light distribution type 1 | direct                    |
| Light distribution type 3 | rotationally symmetric    |

The innovative PATTA F-LED Downlight Set is suitable for ceiling thicknesses of up to 20 mm. Its IP65 class protection type means that it can be used outdoors and in high humidity spaces. The set is available in black, white, or brushed aluminium; and in round or square form. Equipped with a powerful, warm white COB LED in a tiltable mount, as well as an accompanying dimmable LED driver, the set can be used in any lighting situation. Connects to 230V electrical mains.

