




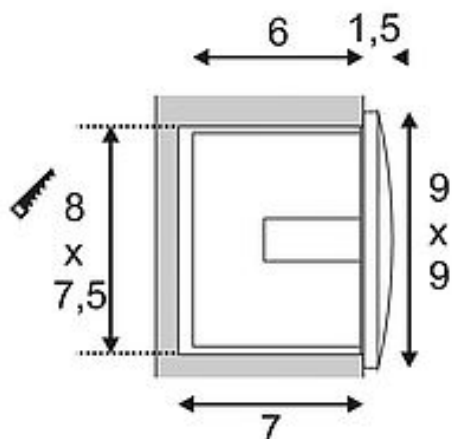

SLV DOWNUNDER OUT LED S
outdoor recessed wall light, LED, 3000K, white

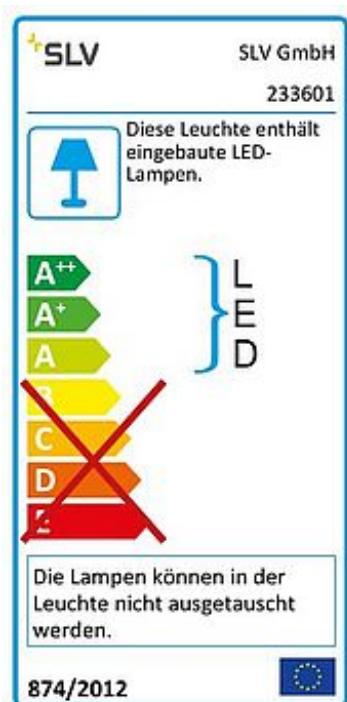

Article number	233601
Feed-in capability	No
Lamp included	No
Installation length	8 cm
Installation width	7.5 cm
Installation depth	7 cm
Width	9 cm
Height	9 cm
Depth	5 cm
Net weight	0.252 kg
Gross weight	0.293 kg
Voltage	220-240V ~50/60Hz sec. 20mA
Protection class	I
IP-rating	IP 55
Average lifespan	20000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	40 lm
Energy efficiency class	A++
Colour	white
Form	square
Light distribution type 1	direct
Light distribution type 2	symmetric
Light distribution type 3	indirect
Material	TBD

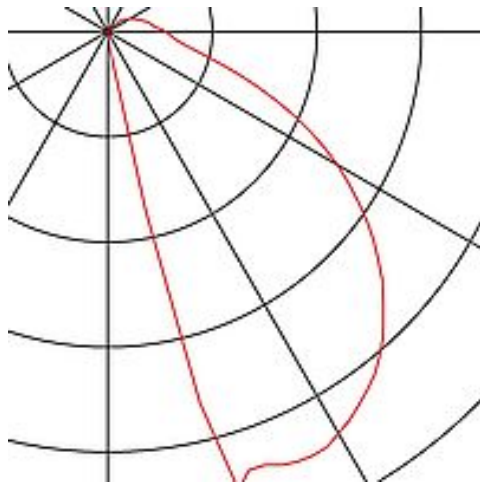

The DOWNUNDER OUT LED S recessed wall light is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. Thanks to its IP55 protection class, the luminaire is suitable for outdoor use. The luminaire is connected directly to the 230V mains supply. A mounting pot is included in the delivery for simple assembly.

Notes
