



Exterior Lights UK Ltd



The Wadhurst 40W is a high performance IP65/IP66 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured with anti-corrosion die cast aluminium, stainless steel fixings and featuring high impact glass for additional protection.

Complete with adjustable spigot for side or column top entry, and 10M of cable for a quick installation.

Options include Nema socket, Dali Driver, LED colour temperature, and spigot size.

Wadhurst 40W - LED Street Light

Street Lighting



Features


- LED rating 5,792lm (4000K & 6000K).
- LED rating 4,900lm (3000K).
- Luminaire flux 5,271lm (4000K & 6000K).
- Luminaire flux 4,410lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 60/76mm spigot options.
- Anti-corrosion die cast aluminium.
- Corrosion resistant polyester powder coating.
- Optimised optics for high uniformity and maximum spacing's between columns.
- Future proof design.

Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

www.exteriorlights.co.uk

01689 606 342

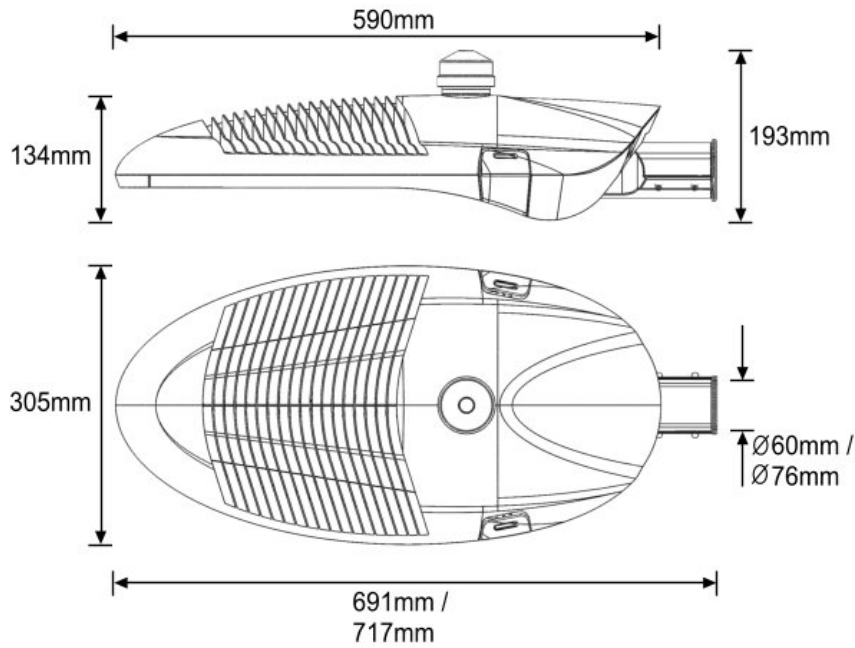

Specifications

Wadhurst 40W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard-Grey-6K														
CQ40-A3C-00G-60	Wadhurst-40W-LED-AC-6K-Std-Grey-60mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.25	Grey	60
CQ40-A3C-00G-76	Wadhurst-40W-LED-AC-6K-Std-Grey-76mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.25	Grey	76
Standard-Grey-4K														
CQ40-A3N-00G-60	Wadhurst-40W-LED-AC-4K-Std-Grey-60mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.25	Grey	60
CQ40-A3N-00G-76	Wadhurst-40W-LED-AC-4K-Std-Grey-76mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.25	Grey	76
Standard-Grey-3K														
CQ40-A3W-00G-60	Wadhurst-40W-LED-AC-3K-Std-Grey-60mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.25	Grey	60
CQ40-A3W-00G-76	Wadhurst-40W-LED-AC-3K-Std-Grey-76mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.25	Grey	76
Standard-Grey-NemaSocket-6K														
CQ40-A3C-06G-60	Wadhurst-40W-LED-AC-6K-Std-NemaSocket-Grey-60mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.5	Grey	60
CQ40-A3C-06G-76	Wadhurst-40W-LED-AC-6K-Std-NemaSocket-Grey-76mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.5	Grey	76
Standard-Grey-NemaSocket-4K														
CQ40-A3N-06G-60	Wadhurst-40W-LED-AC-4K-Std-NemaSocket-Grey-60mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.5	Grey	60
CQ40-A3N-06G-76	Wadhurst-40W-LED-AC-4K-Std-NemaSocket-Grey-76mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.5	Grey	76
Standard-Grey-NemaSocket-3K														
CQ40-A3W-06G-60	Wadhurst-40W-LED-AC-3K-Std-NemaSocket-Grey-60mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.5	Grey	60
CQ40-A3W-06G-76	Wadhurst-40W-LED-AC-3K-Std-NemaSocket-Grey-76mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.5	Grey	76
Dali-Grey-6K														
CQ40-A3C-20G-60	Wadhurst-40W-LED-AC-6K-Dali-Grey-60mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.25	Grey	60
CQ40-A3C-20G-76	Wadhurst-40W-LED-AC-6K-Dali-Grey-76mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.25	Grey	76

Specifications

Wadhurst 40W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Dali-Grey-4K														
CQ40-A3N-20G-60	Wadhurst-40W-LED-AC-4K-Dali-Grey-60mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.25	Grey	60
CQ40-A3N-20G-76	Wadhurst-40W-LED-AC-4K-Dali-Grey-76mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.25	Grey	76
Dali-Grey-3K														
CQ40-A3W-20G-60	Wadhurst-40W-LED-AC-3K-Dali-Grey-60mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.25	Grey	60
CQ40-A3W-20G-76	Wadhurst-40W-LED-AC-3K-Dali-Grey-76mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.25	Grey	76
Dali-Grey-NemaSocket-6K														
CQ40-A3C-26G-60	Wadhurst-40W-LED-AC-6K-Dali-NemaSocket-Grey-60mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.5	Grey	60
CQ40-A3C-26G-76	Wadhurst-40W-LED-AC-6K-Dali-NemaSocket-Grey-76mm	LED	5,792	40	CW	6K	Ra>70	220-240	390	5,271	132	8.5	Grey	76
Dali-Grey-NemaSocket-4K														
CQ40-A3N-26G-60	Wadhurst-40W-LED-AC-4K-Dali-NemaSocket-Grey-60mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.5	Grey	60
CQ40-A3N-26G-76	Wadhurst-40W-LED-AC-4K-Dali-NemaSocket-Grey-76mm	LED	5,792	40	NW	4K	Ra>70	220-240	390	5,271	132	8.5	Grey	76
Dali-Grey-NemaSocket-3K														
CQ40-A3W-26G-60	Wadhurst-40W-LED-AC-3K-Dali-NemaSocket-Grey-60mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.5	Grey	60
CQ40-A3W-26G-76	Wadhurst-40W-LED-AC-3K-Dali-NemaSocket-Grey-76mm	LED	4,900	40	WW	3K	Ra>80	220-240	390	4,410	110	8.5	Grey	76

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.