




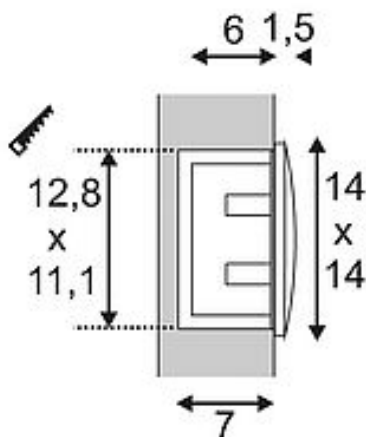

SLV DOWNUNDER OUT LED L
outdoor recessed wall light, LED, 3000K, white

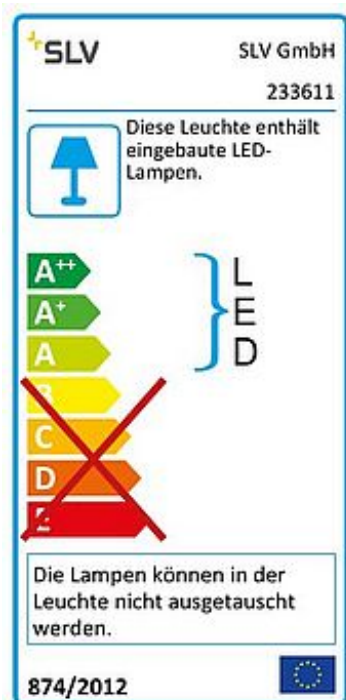

| | |
|---------------------------|----------------------------------|
| Article number | 233611 |
| Feed-in capability | No |
| Lamp included | No |
| Installation length | 12.8 cm |
| Installation width | 11.1 cm |
| Installation depth | 7 cm |
| Width | 14 cm |
| Height | 14 cm |
| Depth | 5 cm |
| Net weight | 0.488 kg |
| Gross weight | 0.548 kg |
| Voltage | 220-240V ~50/60Hz sec. 20mA |
| Protection class | I |
| IP-rating | IP 55 |
| Average lifespan | 20000 Hours |
| Colour temperature | 3000 Kelvin |
| Colour rendering index | 80 |
| Luminous flux | 155 lm |
| Energy efficiency class | A++ |
| Way of mounting | Recessed mounted / Wall recessed |
| Colour | white |
| Form | square |
| Light distribution type 1 | direct |
| Light distribution type 2 | symmetric |
| Light distribution type 3 | indirect |
| Material | TBD |

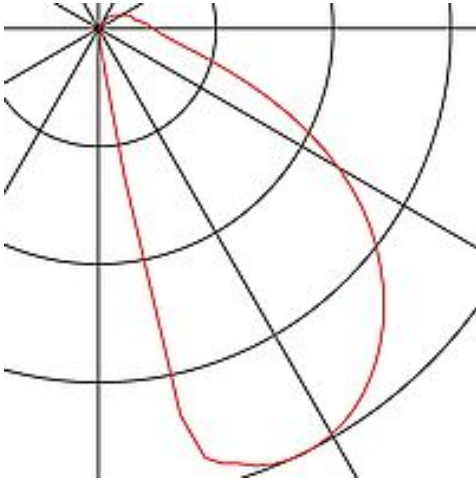

The DOWNUNDER OUT LED L recessed wall light is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. Thanks to its IP55 protection class, the luminaire is suitable for outdoor use. The luminaire is connected directly to the 230V mains supply. A mounting pot is included in the delivery for simple assembly.

Notes
