

## DOWNUNDER OUT LED L

outdoor recessed wall light, LED, 3000K, anthracite



SLV

Article number 233615

Feed-in capability No

Lamp included No

Installation length 12.8 cm

Installation width 11.1 cm

Installation depth 7 cm

Width 14 cm

Height 14 cm

Depth 5 cm

Net weight 0.488 kg

Gross weight 0.549 kg

Voltage 220-240V ~50/60Hz sec. 20mA

Protection class I

IP-rating IP 55

Average lifespan 20000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 85 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Wall recessed

Colour anthracite


Form square


Light distribution type 1 direct

Light distribution type 2 symmetric


Light distribution type 3 indirect

Material TBD

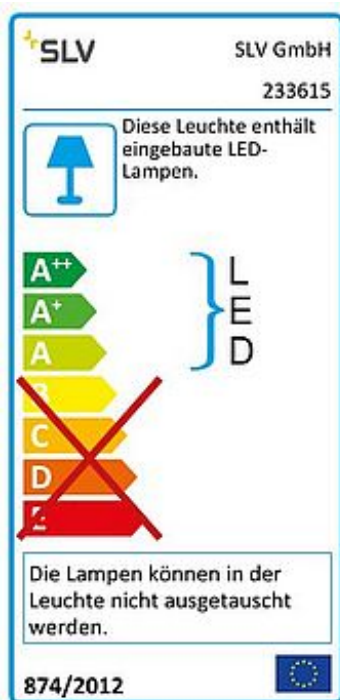

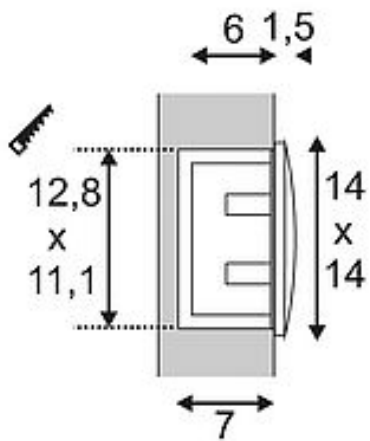

The DOWNUNDER OUT LED L recessed wall light is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. Thanks to its IP55 protection class, the luminaire is suitable for outdoor use. The luminaire is connected directly to the 230V mains supply. A mounting pot is included in the delivery for simple assembly.

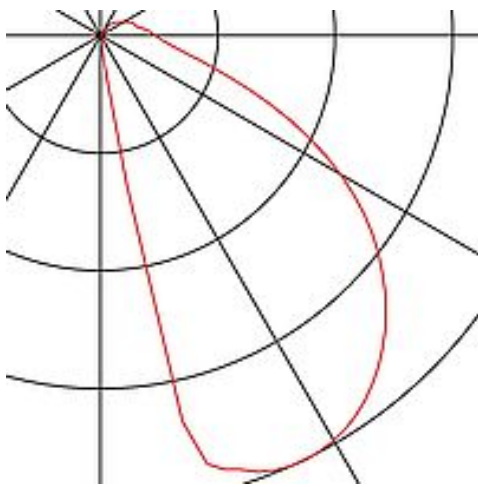

#### Notes

---



---



---