

Uplights

E99252WWN Delphi LED Recessed Uplight – 44w 240v IP67

Delphi LED Recessed Uplight combines a cool top lens, long lamp life and energy efficiency. Ideally suited for uplighting large trees or buildings from lawns or paved areas. The powerful and efficient 44w COB LED generates 5200 lumen output with a 36° beam angle, whilst remaining cool enough to be used in walk over areas. The lamp and reflector assembly are mounted on an adjustable cradle so the beam can be tilted up to 20° from vertical to achieve precise lighting control.



PHYSICAL DATA


- Powder coated cast aluminium body
- Borosilicate glass lens
- 316 grade stainless steel top ring.
- IP67 Rated.
- Dark grey interior to minimise undesirable reflections.
- 270mm in diameter and sits in a polymer ground burial sleeve measuring 259mm diameter and 360 mm deep.

ELECTRICAL DATA

- 240v ac.
- 1 x 44W COB LED
- 5200 Lumen output
- 3000K Warm White
- LED lamp assembly is replaceable in situ.
- Typical lifespan 20000 hours.
- Supplied with 1.8m factory fitted H07RN-F three core 1mm² cable

COMPLIANCE & WARRANTY

- 2 Year warranty
- CE / RoHS Compliant

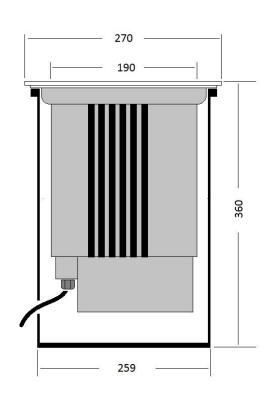



Product Specification Sheet

Uplights

INSTALLATION

These lights must be installed by a qualified electrician. Direct burial in the ground: prewired with rubber cable and 20mm IP68 gland for connection to mains supply via a separate underground joint kit (order T9969 separately).

Ensure 300mm depth of shingle drainage below the uplight. Using a single RCD for large numbers of 240v fittings is not recommended due to the risk of nuisance tripping. We advise the use of separate RCD protection for each circuit and a maximum of 12 fittings per RCD.

Not Suitable for waterlogged ground.